




Power you can trust

www.gentechgenerators.com.au



GENTECH 3 PHASE PETROL GENERATORS 7 kVA TO 16kVA

These 3 phase petrol generators all come standard with 2 x single phase outlets and 1 x 3 phase 5 pin outlet, Reliable NSM alternator & powerful Honda Australia approved engines.

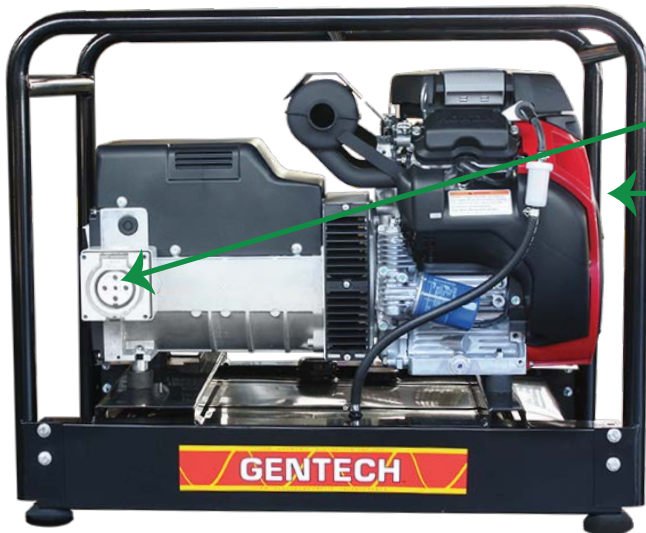

1 x 20 Amp 3 phase 5 pin outlet

Honda engine

12kVA Honda Generator
Model: EP12000HSRE/3

1 x 32 Amp 3 phase 5 pin outlet

NSM Alternator



34L long range fuel tank**

16kVA Honda Generator
Model: EP16000HSRE/3



7 kVA Honda Generator
Model: EP7000HSR/3 *



POWERED by
HONDA

*Available in an Electric Start: EP7000HSRE/3
** available on 12 and 16kVA generators
specifications are subject to change without notice



Power you can trust

www.gentechgenerators.com.au



GENTECH 3 PHASE PETROL GENERATORS

7 kVA TO 16kVA

		EP7000HSR/3	EP7000HSRE/3	EP12000HSRE/3	EP16000HSRE/3
GENERATOR	Rated Voltage	230V	230V	230V	230V
	Frequency	50Hz	50Hz	50Hz	50Hz
	Rated Output	5600 Watts	5600 Watts	9600 Watts	12800 Watts
	Max. Output	7kVA	7kVA	12kVA	16kVA
ENGINE	Engine Type	Honda GX390	Honda GX390	Honda GX630 V-Twin	Honda GX690 V-Twin
	Horsepower	11.7HP	11.7HP	20.8HP	22.1HP
	Starting System	Recoil	Recoil/Electric	Recoil/Electric	Recoil/Electric
GENERAL	Size - LxWxH (mm)	735x546x525	735x545x525	876x546x700	876x546x700
	Dry Weight	80kg	85kg	130kg	165kg
	Fuel Tank Capacity	6.1L	6.1L	34L	34L
	Operating Hrs (80% Load)	2.5hr	2.5hr	6.15hr	5.66hr
	Fuel Consumption (80% Load)	2.44L/hr	2.44L/hr	5.53L/hr	6.01L/hr
	Noise Level (7m)	69 dbA	69 dbA	75 dbA	75 dbA
FEATURES	Outlets	2 x 15 Amp, 1ph 1 x 20 Amp, 3ph 5 pin	2 x 15 Amp, 1ph 1 x 20 Amp, 3ph 5 pin	2 x 15 Amp, 1ph 1 x 20 Amp, 3ph 5 pin	2 x 15 Amp, 1ph 1 x 32 Amp, 3ph 5 pin
	Centre point lift	X	X	✓	✓
	Battery	X	✓	✓	✓
	Auto Decompressor	✓	✓	✓	✓

POWERED by HONDA™



specifications are subject to change without notice

Victoria: Head Office
59 Export Drive
Brooklyn VIC 3012
Ph: +61 3 9316 9799
Fax: +61 3 9314 0909
Email: sales@wellcross.com.au

New South Wales
Unit 2/1040 Canley Vale Road
Wetherill Park NSW 2164
Ph: +61 2 9757 5800
Fax: +61 2 9757 5899
Email: nsw@wellcross.com.au

Queensland
Unit 2/55 Christensen Rd
Stapylton QLD 4207
Ph: +61 7 3386 2400
Fax: +61 7 3386 1241
Email: qld@wellcross.com.au

North Queensland
Unit 19/547 Industry Park
547-593 Woolcock St
Mount Louisa, Townsville, QLD 4814
Ph: +61 7 4774 6331
Email: nthqld@wellcross.com.au

Western Australia
Unit 8/235 Camboon Road
Malaga WA 6090
Ph: +61 8 9248 2955
Fax: +61 8 9248 2933
Email: wa@wellcross.com.au

South Australia
Ph: 0417 592 530
Email: bnicholas@wellcross.com.au