




Power you can trust

8 kVA HONDA POWERED PETROL GENERATOR WITH RCD

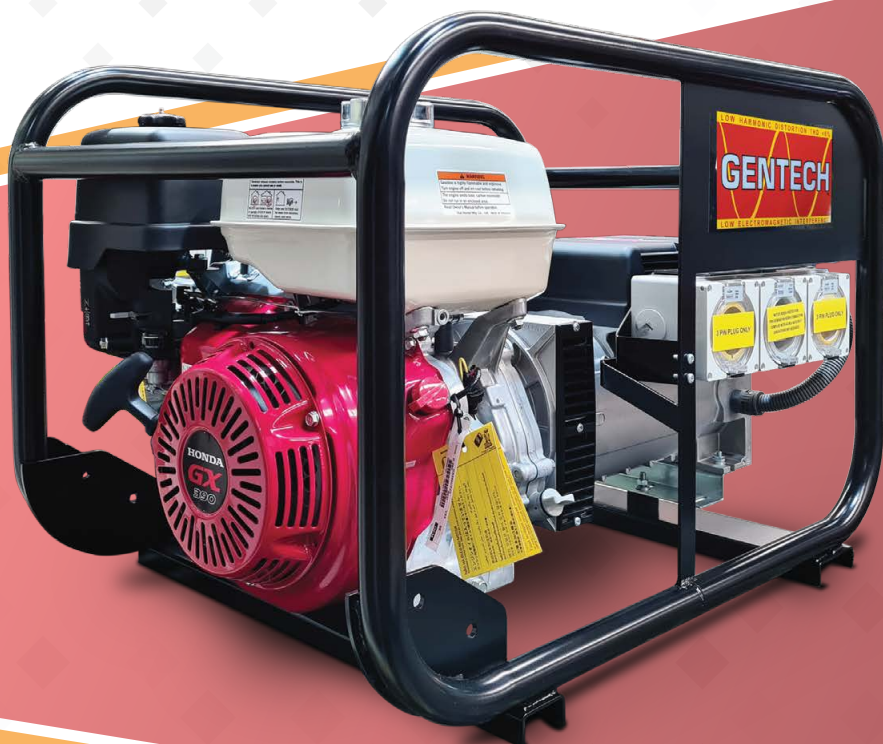

OPTIONAL WHEELS & HANDLES KIT

Turn this generator into a fully featured trade unit with the optional kit which includes wheels, handles and a centre point lifting bar.

Part No: 10-GN-N3-32MM-008



MODEL NO:

EP8000HSR-RCD-V2

TECHNICAL SPECIFICATIONS

Power Rating:	8 kVA
Alternator Rating:	9.5kVA
Engine Model:	Honda GX390
Phase:	1 phase
Starting System:	Recoil
Fuel Tank Capacity:	6.1 L
Noise Level @ 7m:	72 dBA
Outlets:	15 Amp RCD
Volts:	240 V
Fuel Consumption:	2.58 L/Hr @ 80% Load
Operation Hours:	2.36 hrs @ 80% Load
Fuel Type:	Petrol
Dimensions (L x W x H):	710 x 570 x 560 mm
Weight:	90 kg

If you're in need of serious power for large tools at the worksite, then look no further!

This workhorse generator features a reliable Honda GX390 engine, sturdy 32mm frame and 15 amp outlets with WorkSafe approved RCD protection.

POWERED by
HONDA™



VIC Head Office: 59 Export Dr, Brooklyn VIC 3012 | Ph: 03 9316 9777 | Fax: 03 9314 0909 | sales@wellcross.com.au
New South Wales: Unit 2/1040 Canley Vale Rd, Wetherill Park NSW 2164 | Ph: 02 9757 5800 | Fax: 02 9757 5899 | nsw@wellcross.com.au
Queensland: Unit 2/55 Christensen Rd, Stapylton QLD 4207 | Ph: 07 4774 6331 | Fax: 07 3386 1241 | qld@wellcross.com.au
North Queensland: Unit 19/547 Industry Park, 547-593 Woolcock St, Mount Lousa, Townsville, QLD 4814 | Ph: 07 4774 6331 | nthqld@wellcross.com.au
Western Australia: Unit 8/235 Camboon Rd, Malaga WA 6090 | Ph: 08 9248 2955 | Fax: 08 9248 2933 | wa@wellcross.com.au
South Australia: Ph: 0417 592 530 | bnicholas@wellcross.com.au

gentechgenerators.com.au

1800 248 699